

# MAYHO

Empowering Every Lift

SERIES

# MH-*e*

## Quality Electric Chain Hoist

Multiple Models for Your Selection



# Lift Smarter, Work Safer !

Advanced Technology, Superior Performance

The MH-e series electric chain hoist is designed with robust construction, efficient motor, durable chain, and precise gearbox, delivering stable & dependable lifting performance.

It features easy operation, strong lifting capacity, smooth running, and high safety standards. Ideal for a wide range of applications.



MH-EOH SERIES



MH-EOR SERIES  
( Explosion-proof )



MH-EOB SERIES



## MH-EOH SERIES



Hook Type



Electric Trolley Type



Super Low Lifting type

The MH-EOH series comes with three types, including hook type, electric triley type and super low lifting type, can be applied to different use situations with good reliable performance.

Weight lifting capacity range: from 125KG ( 276 lbs) to 2,000KG ( 4,409 lbs).

MH-EOH



MAYHO



MH-E  
Series





# Hook Type

**Lifting Capacity Including:** 125KG ( 276 lbs) 200KG ( 441 lbs) 250KG ( 551 lbs)  
500KG (1,100 lbs) 800KG ( 1,764 lbs) 1,000KG ( 2,250 lbs) 2,000KG ( 4,409 lbs)



| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | H           | A   | B   | C   |
| 125                    | 4/16                             | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50/60                   | 390         | 422 | 245 | 268 |
| 250                    | 2/8                              | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50/60                   | 390         | 422 | 245 | 268 |

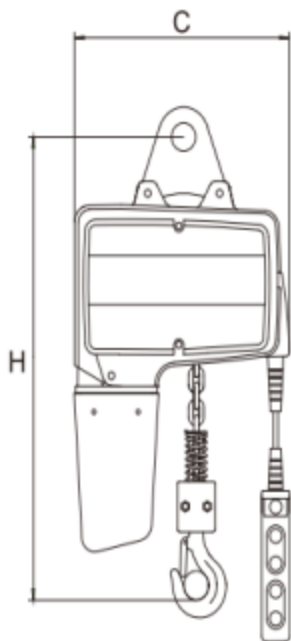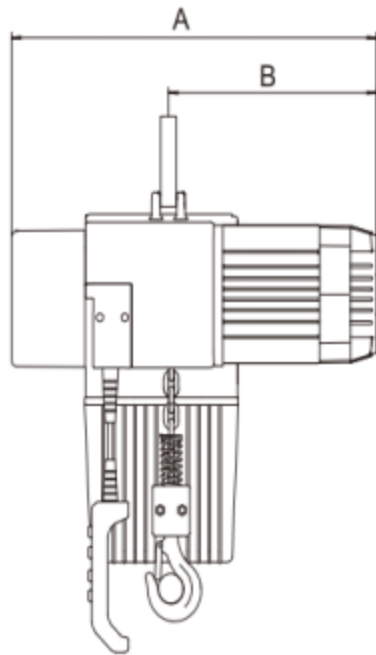



| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | H           | A   | B   | C   |
| 200                    | 4/16                             | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50/60                   | 430         | 468 | 167 | 280 |
| 500                    | 2/8                              | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50/60                   | 430         | 468 | 167 | 280 |

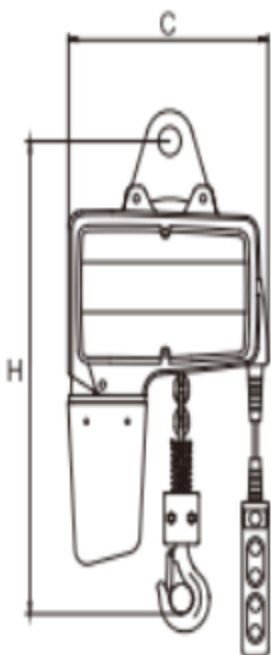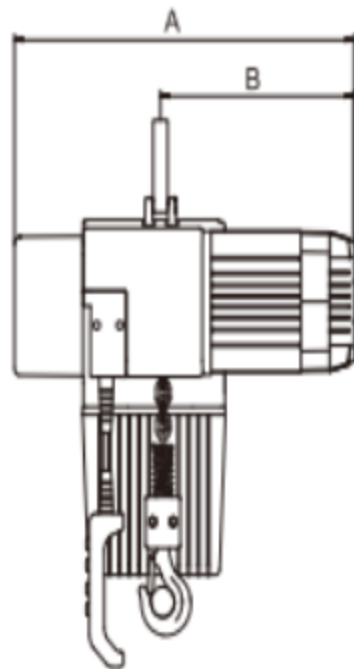

| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | H           | A   | B   | C   |
| 800                    | 3/12                             | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50/60                   | 580         | 578 | 336 | 349 |
| 1000                   | 2/8                              | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50/60                   | 580         | 578 | 336 | 349 |

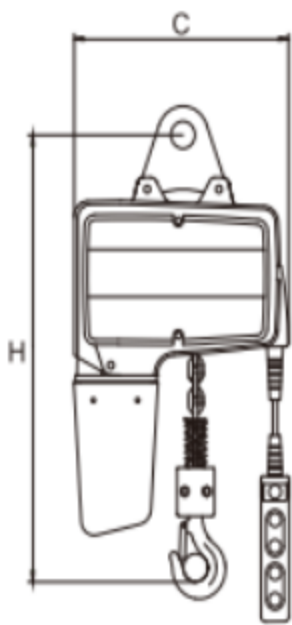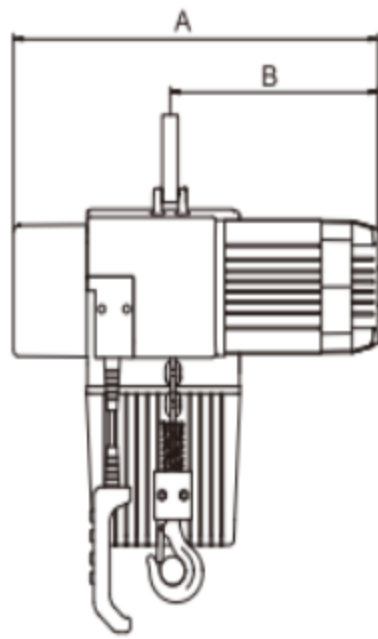

| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | H           | A   | B   | C   |
| 2000                   | 1/4                              | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50/60                   | 660         | 578 | 336 | 349 |

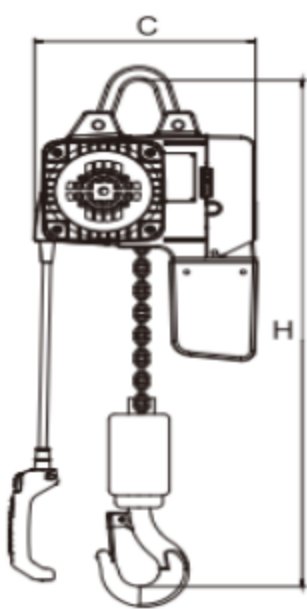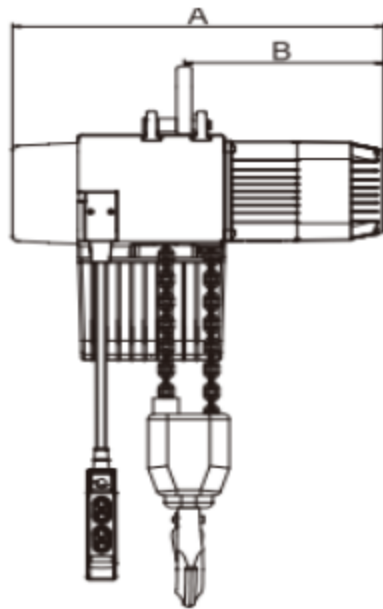



MAYHO


MH-E  
Series




## Electric Trolley Type

**Lifting Capacity Including:** 125KG ( 276 lbs) 200KG ( 441 lbs) 250KG ( 551 lbs)  
500KG (1,100 lbs) 800KG ( 1,764 lbs) 1,000KG ( 2,250 lbs) 2,000KG ( 4,409 lbs)


| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         |                        | 操作电机 Operating Motor |                                 |              |                      |  |  | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|------------------------|----------------------|---------------------------------|--------------|----------------------|--|--|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 速度<br>Speed<br>(r/min) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) |  |  | H           | A   | B   | C   |
| 125                    | 4/16                             | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 450         | 422 | 245 | 268 |
| 250                    | 2/8                              | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 450         | 422 | 245 | 268 |

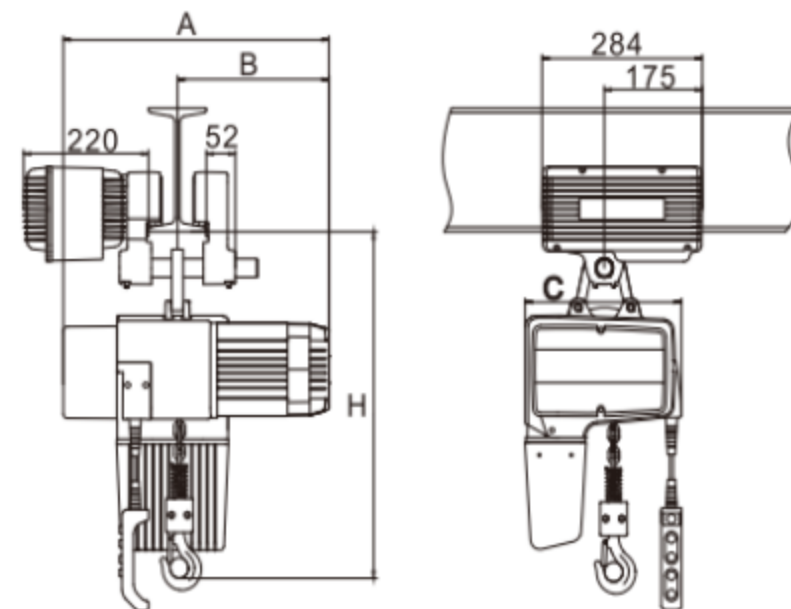


| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         |                        | 操作电机 Operating Motor |                                 |              |                      |  |  | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|------------------------|----------------------|---------------------------------|--------------|----------------------|--|--|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 速度<br>Speed<br>(r/min) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) |  |  | H           | A   | B   | C   |
| 200                    | 4/16                             | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 490         | 468 | 267 | 280 |
| 500                    | 2/8                              | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 490         | 468 | 267 | 280 |

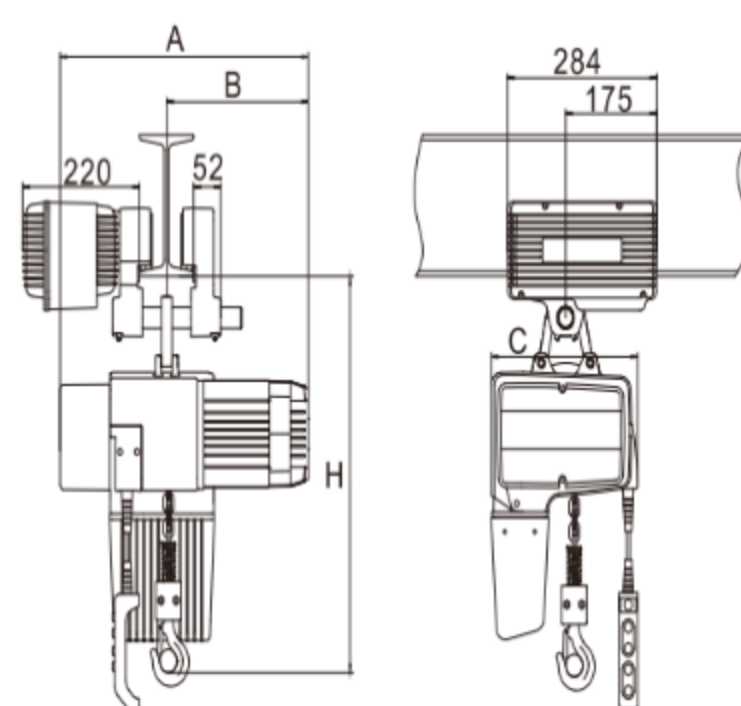

| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         |                        | 操作电机 Operating Motor |                                 |              |                      |  |  | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|------------------------|----------------------|---------------------------------|--------------|----------------------|--|--|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 速度<br>Speed<br>(r/min) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) |  |  | H           | A   | B   | C   |
| 800                    | 3/12                             | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 640         | 578 | 336 | 349 |
| 1000                   | 2/8                              | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 640         | 578 | 336 | 349 |

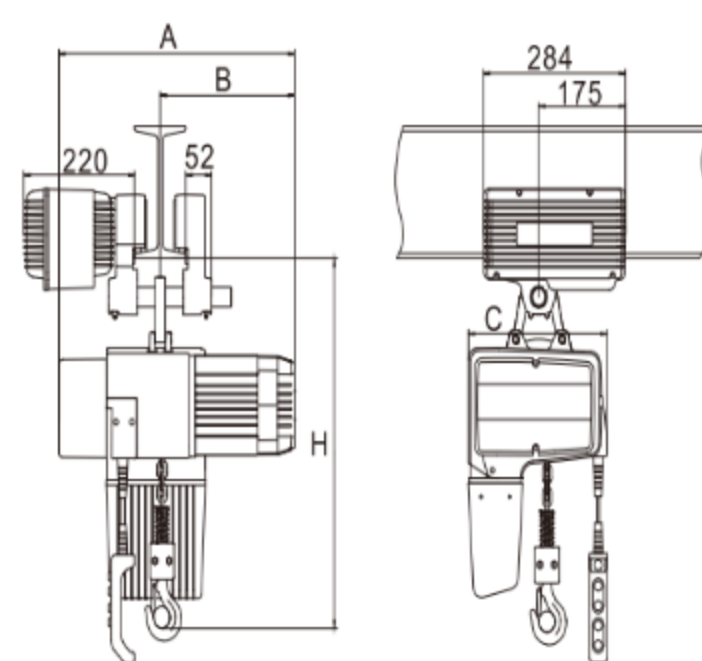

| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         |                        | 操作电机 Operating Motor |                                 |              |                      |  |  | 尺寸 Size(mm) |     |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|------------------------|----------------------|---------------------------------|--------------|----------------------|--|--|-------------|-----|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 速度<br>Speed<br>(r/min) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) |  |  | H           | A   | B   | C   |
| 2000                   | 1/4                              | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50                      | 3.2-14                 | 0.1-0.2              | 500/2200                        | 3            | 380                  |  |  | 720         | 578 | 336 | 349 |

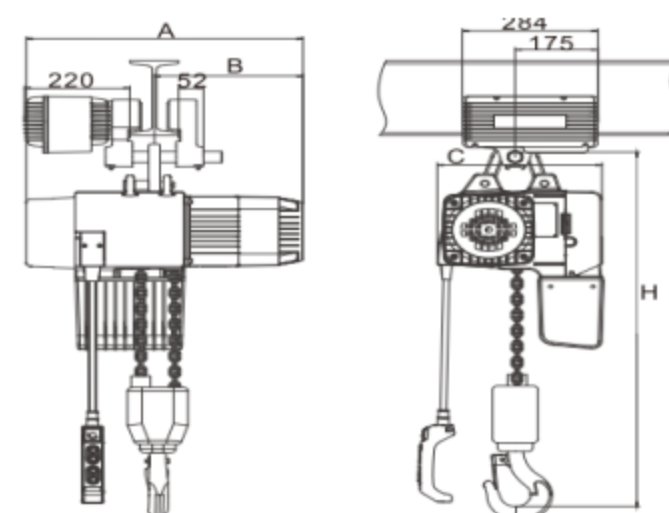



MAYHO


MH-E  
Series




## Super Low Lifting Type

**Lifting Capacity Including:** 125KG ( 276 lbs) 200KG ( 441 lbs) 250KG ( 551 lbs)  
500KG (1,100 lbs) 800KG ( 1,764 lbs) 1,000KG ( 2,250 lbs) 2,000KG ( 4,409 lbs)

| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 尺寸 Size(mm) |     |     |     |       |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-------------|-----|-----|-----|-------|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | H           | A   | B   | C   | D     | E   | F   |
| 125                    | 4/16                             | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50/60                   | 250         | 422 | 245 | 580 | 486.7 | Ø30 | Ø30 |
| 250                    | 4/16                             | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50/60                   | 270         | 468 | 267 | 580 | 486.7 | Ø30 | Ø30 |
| 250                    | 2/8                              | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50/60                   | 250         | 422 | 245 | 580 | 486.7 | Ø30 | Ø30 |
| 500                    | 2/8                              | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50/60                   | 270         | 468 | 267 | 580 | 486.7 | Ø30 | Ø30 |
| 800                    | 3/12                             | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50/60                   | 350         | 578 | 336 | 720 | 595   | Ø30 | Ø30 |
| 1000                   | 2/8                              | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50/60                   | 350         | 578 | 336 | 720 | 595   | Ø30 | Ø30 |

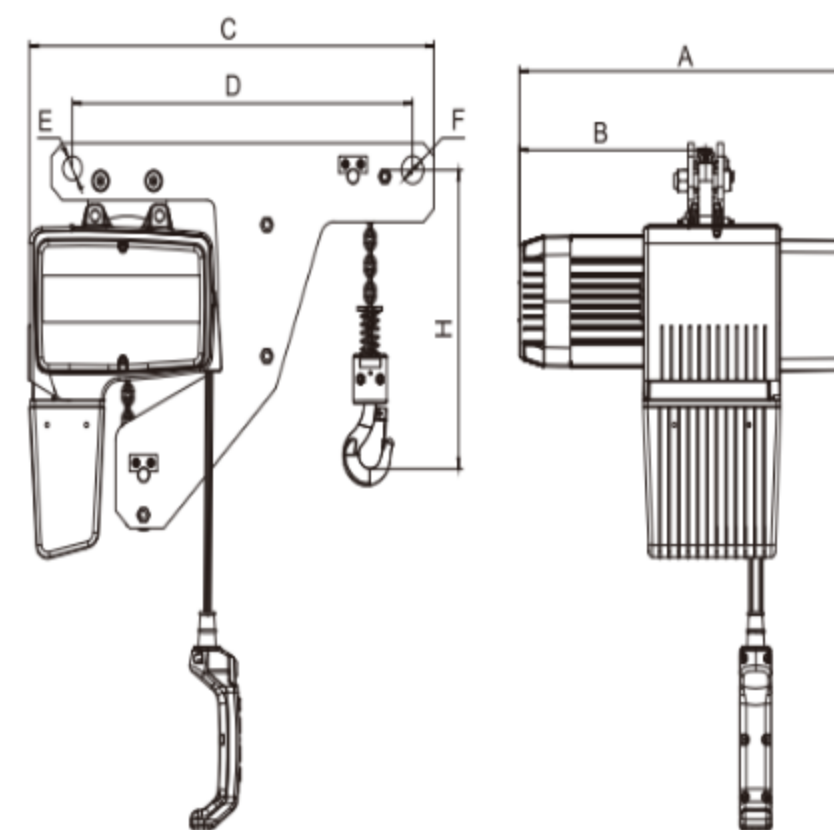

| 容量<br>Capacity<br>(Kg) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 尺寸 Size(mm) |     |     |     |       |     |     |
|------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-------------|-----|-----|-----|-------|-----|-----|
|                        |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | H           | A   | B   | C   | D     | E   | F   |
| 500                    | 4/16                             | 0.06/0.22           | 960/2880                        | 3            | 380                  | 50/60                   | 390         | 422 | 245 | 580 | 486.7 | Ø30 | Ø30 |
| 1000                   | 2/8                              | 0.18/0.72           | 960/2880                        | 3            | 380                  | 50/60                   | 390         | 468 | 267 | 580 | 486.7 | Ø30 | Ø30 |
| 2000                   | 2/8                              | 0.57/2.3            | 960/2880                        | 3            | 380                  | 50/60                   | 490         | 578 | 336 | 720 | 595   | Ø30 | Ø36 |

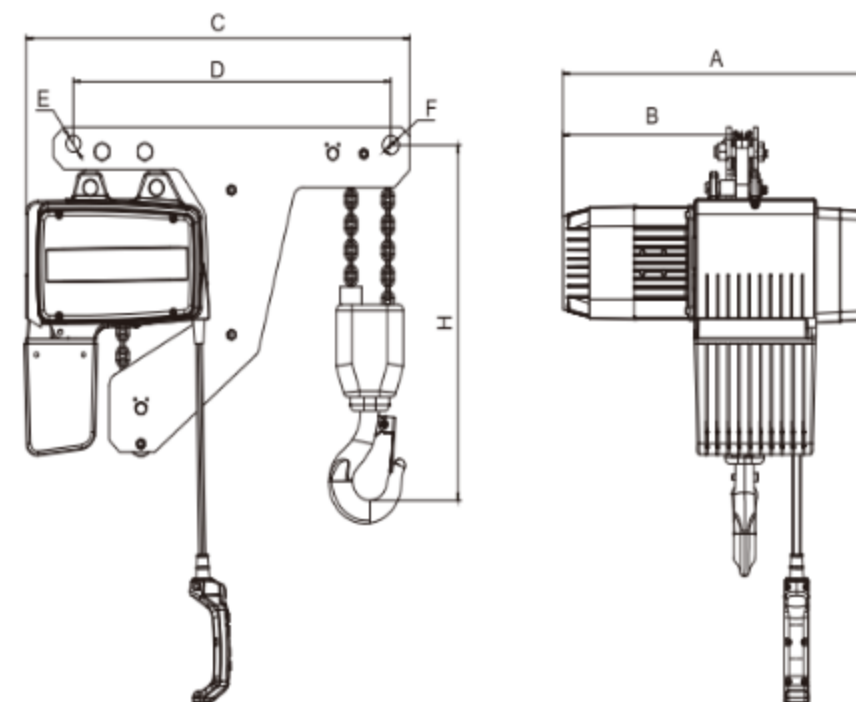

MH-E OH



## MH-EOB SERIES



Hook Type



Electric Trolley Type



Super Low Lifting type

The MH-EOB series offers three models: hook type, electric trolley type, and ultra-low headroom type, suitable for various applications with stable and dependable performance.

Lifting capacity range: from 0.5 Ton (1,102 lbs) to 32Ton (70,548 lbs).

MH-EOB



MAYHO


MH-E  
Series

MAYHO

# Hook Type


| 容量<br>Capacity<br>(Ton) | 起升高度<br>Capacity<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         |
|-------------------------|-------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                         |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 3/9                     | 7.2                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                     | 3.6                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                     | 6.8                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                     | 3.4                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                     | 6.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                     | 2.2                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                     | 3.3                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                     | 5.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |
| 5                       | 3/9                     | 2.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |

|            |      |     |     |     |     |     |    |     |    |    | Unit(mm) |
|------------|------|-----|-----|-----|-----|-----|----|-----|----|----|----------|
| 容量Capacity | H    | A   | B   | D   | E   | I   | J  | K   | L  | N  | M        |
| 0.5        | 550  | 460 | 230 | 240 | 160 | φ32 | 25 | φ32 | 25 | 17 | 17       |
| 1          | 670  | 460 | 230 | 240 | 205 | φ40 | 31 | φ40 | 31 | 24 | 24       |
| 1          | 600  | 520 | 260 | 310 | 205 | φ40 | 31 | φ40 | 31 | 24 | 24       |
| 2          | 750  | 520 | 260 | 310 | 230 | φ49 | 35 | φ49 | 35 | 30 | 30       |
| 2          | 800  | 620 | 300 | 440 | 265 | φ49 | 35 | φ49 | 35 | 30 | 30       |
| 3          | 1000 | 420 | 260 | 310 | 280 | φ59 | 42 | φ59 | 42 | 35 | 35       |
| 3          | 950  | 620 | 300 | 440 | 320 | φ59 | 42 | φ59 | 42 | 35 | 35       |
| 3          | 845  | 620 | 300 | 440 | 265 | φ59 | 42 | φ59 | 42 | 35 | 35       |
| 5          | 1030 | 620 | 300 | 440 | 325 | φ60 | 45 | φ60 | 45 | 43 | 43       |

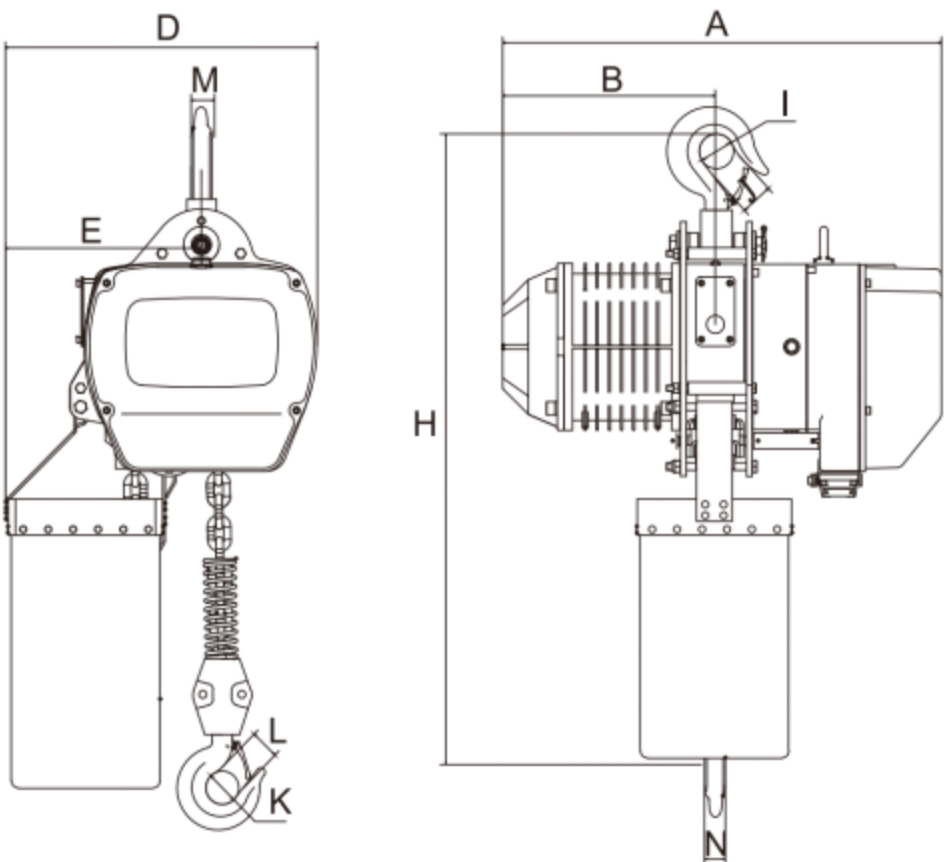

| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 3/9                           | 7.2                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 3.6                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 6.8                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 3.4                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 6.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 2.2                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 3.3                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 5.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |
| 5                       | 3/9                           | 2.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   |

| Unit(mm)   |      |     |     |     |     |     |    |     |    |    |    |
|------------|------|-----|-----|-----|-----|-----|----|-----|----|----|----|
| 容量Capacity | H    | A   | B   | D   | E   | I   | J  | K   | L  | N  | M  |
| 0.5        | 550  | 460 | 230 | 240 | 160 | φ32 | 25 | φ32 | 25 | 17 | 17 |
| 1          | 670  | 460 | 230 | 240 | 205 | φ40 | 31 | φ40 | 31 | 24 | 24 |
| 1          | 600  | 520 | 260 | 310 | 205 | φ40 | 31 | φ40 | 31 | 24 | 24 |
| 2          | 750  | 520 | 260 | 310 | 230 | φ49 | 35 | φ49 | 35 | 30 | 30 |
| 2          | 800  | 620 | 300 | 440 | 265 | φ49 | 35 | φ49 | 35 | 30 | 30 |
| 3          | 1000 | 420 | 260 | 310 | 280 | φ59 | 42 | φ59 | 42 | 35 | 35 |
| 3          | 950  | 620 | 300 | 440 | 320 | φ59 | 42 | φ59 | 42 | 35 | 35 |
| 3          | 845  | 620 | 300 | 440 | 265 | φ59 | 42 | φ59 | 42 | 35 | 35 |
| 5          | 1030 | 620 | 300 | 440 | 325 | φ60 | 45 | φ60 | 45 | 43 | 43 |

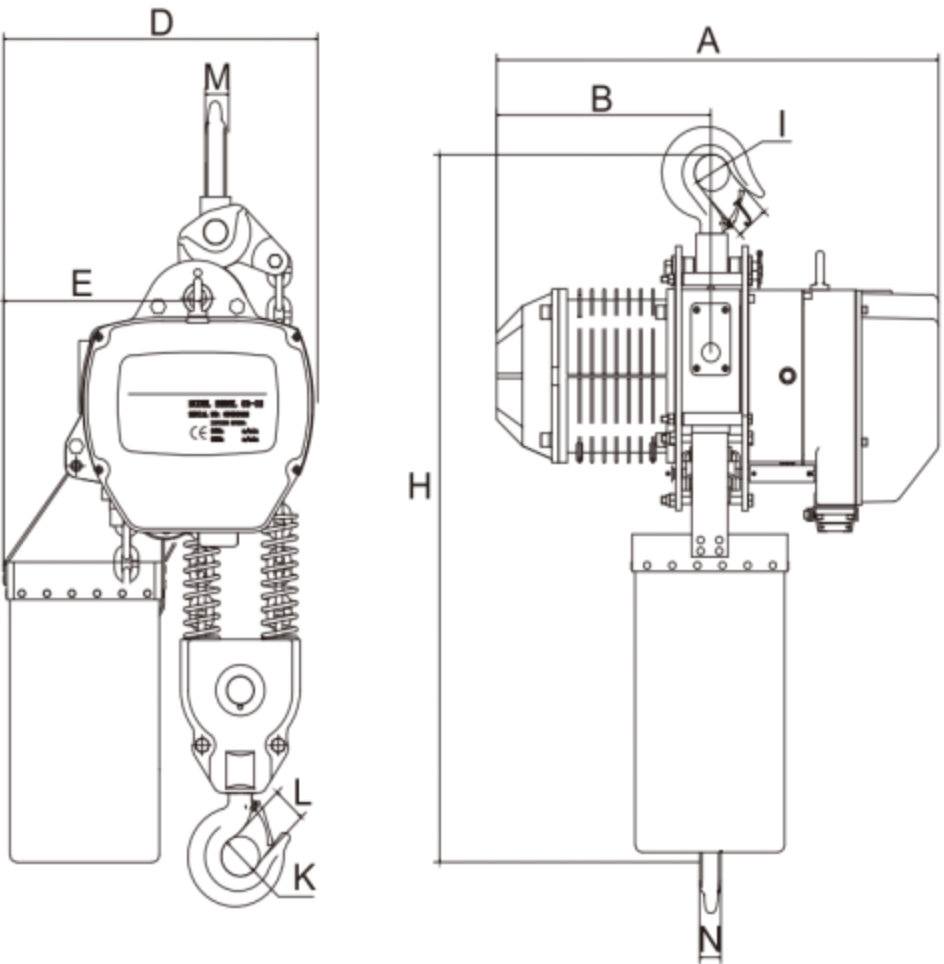


| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 10                      | 3/9                           | 2.8                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   |
| 15                      | 3/9                           | 1.8                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   |
| 20                      | 3/9                           | 1.4                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   |
| 25                      | 3/9                           | 1.1                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   |

ze

Unit(mm)

| 容量Capacity | H    | A   | B   | D    | I    | J   | K    | L   | N  | M  | CHAIN |
|------------|------|-----|-----|------|------|-----|------|-----|----|----|-------|
| 10         | 1400 | 630 | 315 | 940  | φ83  | 68  | φ83  | 68  | 55 | 55 | φ11.2 |
| 15         | 1580 | 630 | 315 | 1110 | φ115 | 90  | φ115 | 90  | 72 | 72 | φ11.2 |
| 20         | 1670 | 630 | 315 | 1300 | φ115 | 90  | φ115 | 90  | 72 | 75 | φ11.2 |
| 25         | 1670 | 630 | 315 | 1500 | φ142 | 110 | φ142 | 110 | 85 | 85 | φ11.2 |

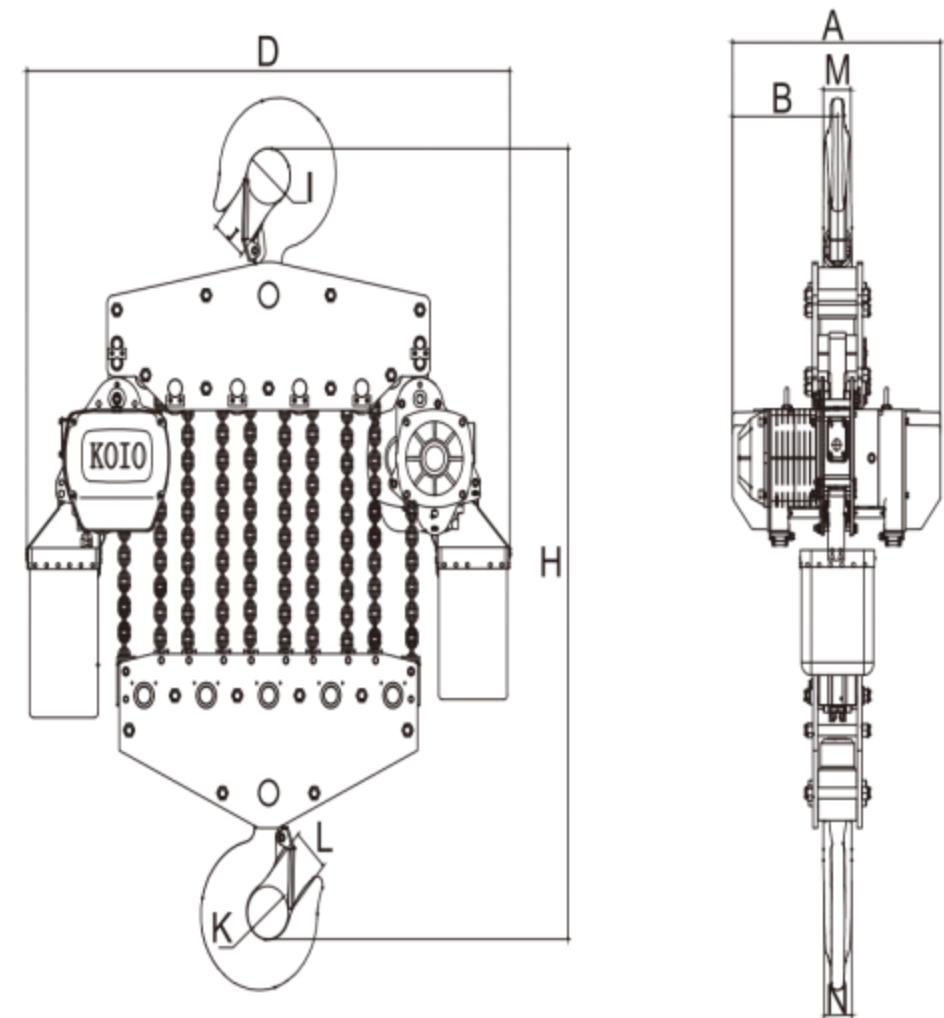



MAYHO

MH-E  
Series

MAYHO



# Electric Trolley Type

| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         | 操作电机 Operating Motor |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 3/9                           | 7.2                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.2                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 3.6                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 6.8                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 3.4                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 6.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 2.2                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 3.3                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 5.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 5                       | 3/9                           | 2.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |

Size

Unit(mm)

| 容量Capacity | H    | A   | B   | D   | E   | F    | K   | L  | N  | P   | T   | 工字钢I-BEAM |
|------------|------|-----|-----|-----|-----|------|-----|----|----|-----|-----|-----------|
| 0.5        | 630  | 460 | 230 | 240 | 160 | φ60  | φ32 | 25 | 17 | 198 | 185 | 70-130    |
| 1          | 640  | 460 | 230 | 240 | 205 | φ95  | φ40 | 31 | 24 | 315 | 252 | 80-160    |
| 1          | 650  | 520 | 260 | 310 | 205 | φ95  | φ40 | 31 | 24 | 315 | 252 | 80-160    |
| 2          | 740  | 520 | 260 | 310 | 230 | φ110 | φ49 | 35 | 30 | 325 | 252 | 82-178    |
| 2          | 770  | 620 | 300 | 440 | 265 | φ125 | φ49 | 35 | 30 | 325 | 252 | 82-178    |
| 3          | 920  | 420 | 260 | 310 | 280 | φ125 | φ59 | 42 | 35 | 340 | 252 | 110-178   |
| 3          | 940  | 620 | 300 | 440 | 320 | φ125 | φ59 | 42 | 35 | 340 | 252 | 100-180   |
| 3          | 840  | 620 | 300 | 440 | 265 | φ125 | φ59 | 42 | 35 | 340 | 252 | 100-180   |
| 5          | 1015 | 620 | 300 | 440 | 325 | φ175 | φ60 | 45 | 43 | 400 | 252 | 110-180   |

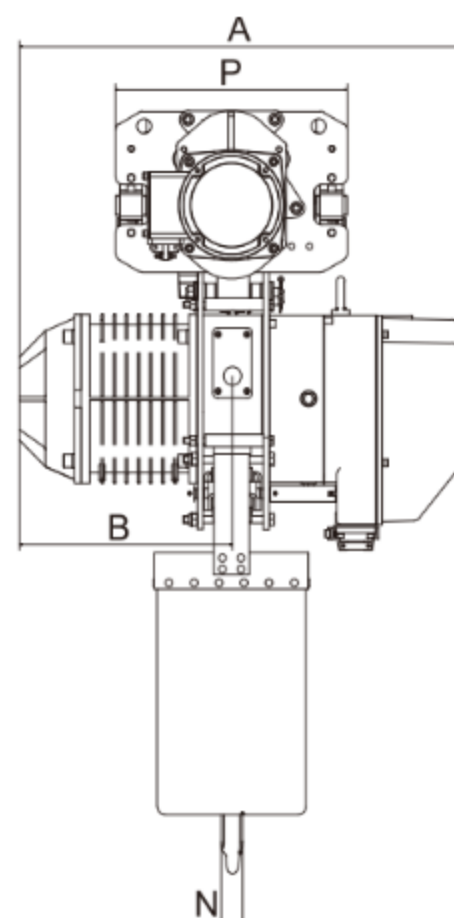
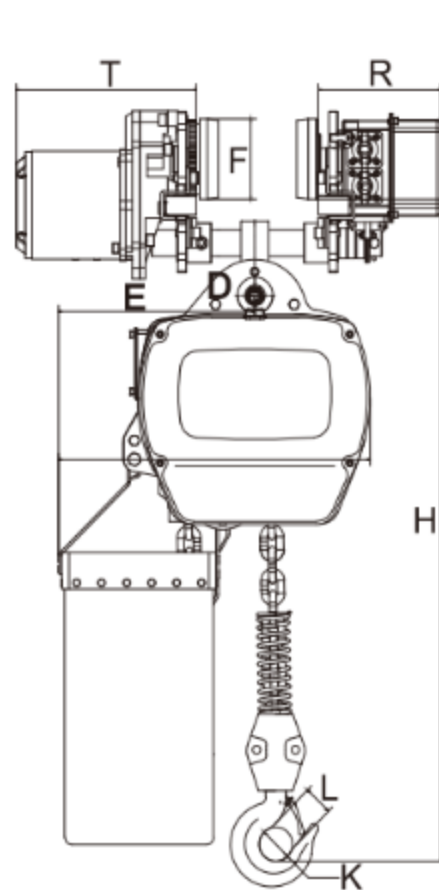


| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         | 操作电机 Operating Motor |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 3/9                           | 7.2                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.2                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 3.6                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 6.8                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 3.4                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 6.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 2.2                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 3.3                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 5.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 5                       | 3/9                           | 2.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |

Size

Unit(mm)

| 容量Capacity | H    | A   | B   | D   | E   | F    | K   | L  | N  | P   | T   | 工字钢I-BEAM |
|------------|------|-----|-----|-----|-----|------|-----|----|----|-----|-----|-----------|
| 0.5        | 630  | 460 | 230 | 240 | 160 | φ60  | φ32 | 25 | 17 | 198 | 185 | 70-130    |
| 1          | 640  | 460 | 230 | 240 | 205 | φ95  | φ40 | 31 | 24 | 315 | 252 | 80-160    |
| 1          | 650  | 520 | 260 | 310 | 205 | φ95  | φ40 | 31 | 24 | 315 | 252 | 80-160    |
| 2          | 740  | 520 | 260 | 310 | 230 | φ110 | φ49 | 35 | 30 | 325 | 252 | 82-178    |
| 2          | 770  | 620 | 300 | 440 | 265 | φ125 | φ49 | 35 | 30 | 325 | 252 | 82-178    |
| 3          | 920  | 420 | 260 | 310 | 280 | φ125 | φ59 | 42 | 35 | 340 | 252 | 110-178   |
| 3          | 940  | 620 | 300 | 440 | 320 | φ125 | φ59 | 42 | 35 | 340 | 252 | 100-180   |
| 3          | 840  | 620 | 300 | 440 | 265 | φ125 | φ59 | 42 | 35 | 340 | 252 | 100-180   |
| 5          | 1015 | 620 | 300 | 440 | 325 | φ175 | φ60 | 45 | 43 | 400 | 252 | 110-180   |

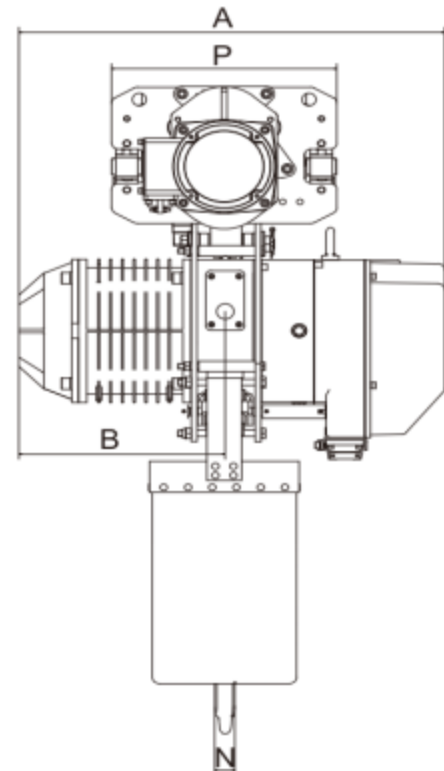
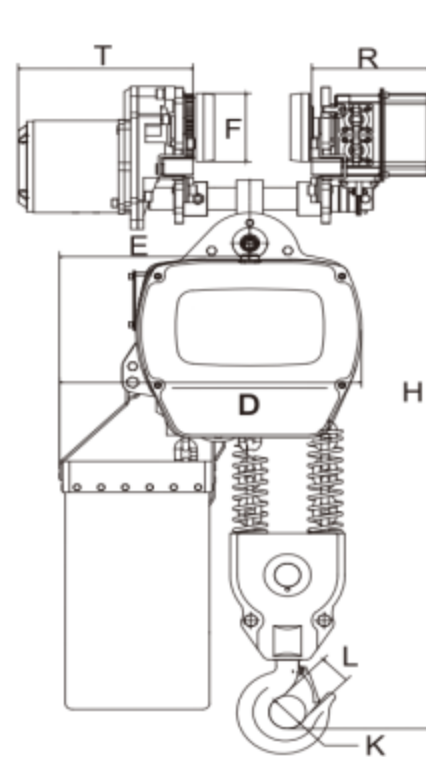


| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         | 操作电机 Operating Motor |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 7.5                     | 3/9                           | 1.8                              | 3                   | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |

Size

Unit(mm)

| 容量Capacity | H    | A   | B   | D   | E   | F   | K   | L  | N  | 工字钢I-BEAM |
|------------|------|-----|-----|-----|-----|-----|-----|----|----|-----------|
| 7.5        | 1200 | 620 | 300 | 600 | 256 | 168 | φ83 | 68 | 55 | 150-220   |

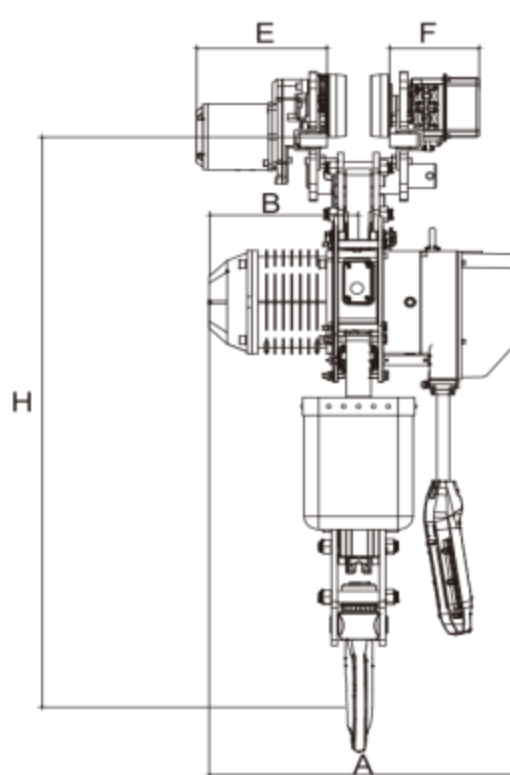
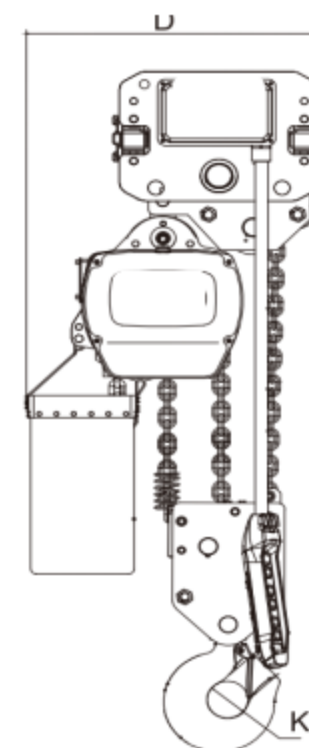


| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Motor  |                                 |              |                      |                         | 运行速度<br>Traveing speed<br>(m/min) | 操作电机 Operating Motor |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|-----------------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |                                   | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 10                      | 3/9                           | 2.8                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                             | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 15                      | 3/9                           | 1.8                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                             | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 20                      | 3/9                           | 1.4                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                             | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 25                      | 3/9                           | 1.1                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                             | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 32                      | 3/9                           | 0.9                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                             | 0.75x2               | 1400                            | 3            | 220-440              | 50/60                   |

ct Size

Unit(mm)

| 容量Capacity | H    | A   | B   | D    | E   | F   | K    | L   | N  | 工字钢I-BEAM | Chain |
|------------|------|-----|-----|------|-----|-----|------|-----|----|-----------|-------|
| 10         | 1200 | 630 | 315 | 940  | 256 | 265 | φ83  | 68  | 55 | 150-220   | φ11.2 |
| 15         | 1360 | 630 | 315 | 1120 | 256 | 265 | φ115 | 90  | 72 | 150-220   | φ11.2 |
| 20         | 1470 | 630 | 315 | 1310 | 256 | 265 | φ115 | 90  | 72 | 150-220   | φ11.2 |
| 25         | 1580 | 630 | 315 | 1500 | 256 | 265 | φ142 | 110 | 85 | 150-220   | φ11.2 |
| 32         | 1640 | 630 | 315 | 1720 | 256 | 265 | φ142 | 110 | 85 | 150-220   | φ11.2 |

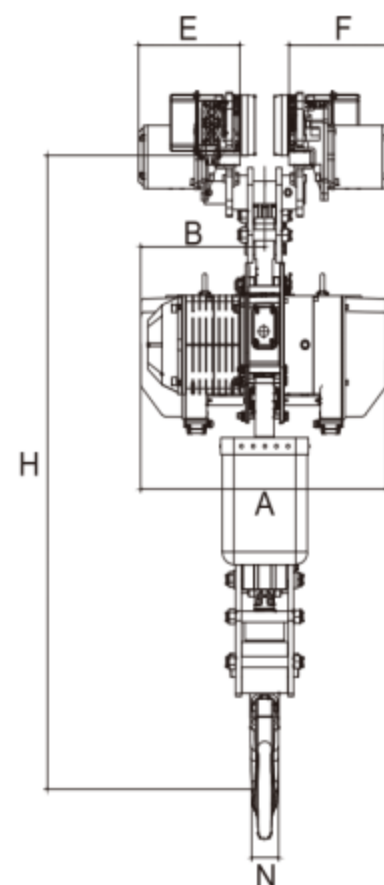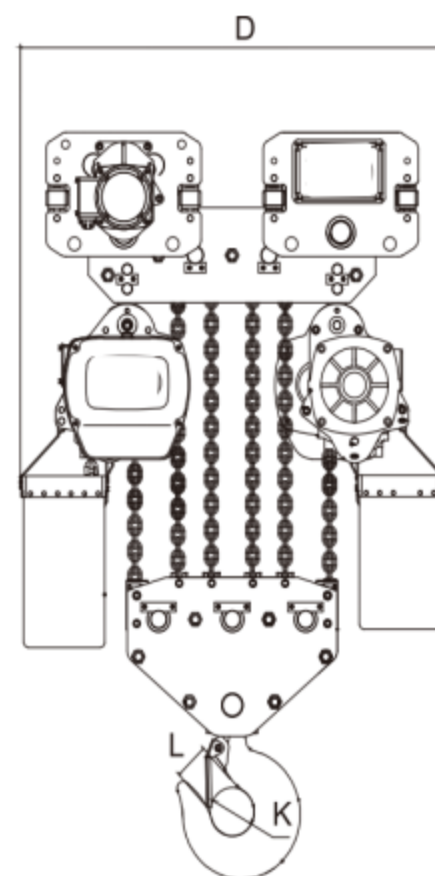



MAYHO

MH-E  
Series

MAYHO


Super Low Lifting

| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 操作电机 Operating Moter |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 3/9                           | 7.2                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.2                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 3.6                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 6.8                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 3.4                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 6.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 2.2                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 3.3                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 5.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 5                       | 3/9                           | 2.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 7.5                     | 3/9                           | 1.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |

Size

Unit(mm)


| 容量Capacity | H   | A   | B   | F    | K   | L  | N  | O   | P   | Q     | T   | R   | 工字钢I-BEAM |
|------------|-----|-----|-----|------|-----|----|----|-----|-----|-------|-----|-----|-----------|
| 0.5        | 350 | 460 | 230 | φ60  | φ32 | 25 | 17 | 190 | 315 | 400.7 | 185 | 168 | 100-160   |
| 1          | 410 | 460 | 230 | φ95  | φ40 | 31 | 24 | 190 | 315 | 400.7 | 252 | 168 | 100-160   |
| 1          | 480 | 520 | 260 | φ95  | φ40 | 31 | 24 | 190 | 315 | 445   | 252 | 168 | 100-160   |
| 2          | 535 | 520 | 260 | φ110 | φ49 | 35 | 30 | 257 | 325 | 444.5 | 252 | 168 | 120-160   |
| 2          | 570 | 620 | 300 | φ110 | φ49 | 35 | 30 | 257 | 325 | 505   | 252 | 168 | 120-160   |
| 3          | 680 | 520 | 260 | φ125 | φ59 | 42 | 35 | 310 | 325 | 584   | 252 | 168 | 120-160   |
| 3          | 685 | 620 | 300 | φ125 | φ59 | 42 | 35 | 310 | 340 | 503   | 252 | 168 | 120-160   |
| 3          | 640 | 620 | 300 | φ125 | φ59 | 42 | 35 | 310 | 340 | 526   | 252 | 168 | 120-160   |
| 5          | 740 | 620 | 300 | φ175 | φ60 | 45 | 43 | 355 | 400 | 541   | 252 | 168 | 120-160   |
| 7.5        | 900 | 620 | 300 | φ175 | φ83 | 68 | 55 | 355 | 400 | 751   | 252 | 168 | 120-160   |

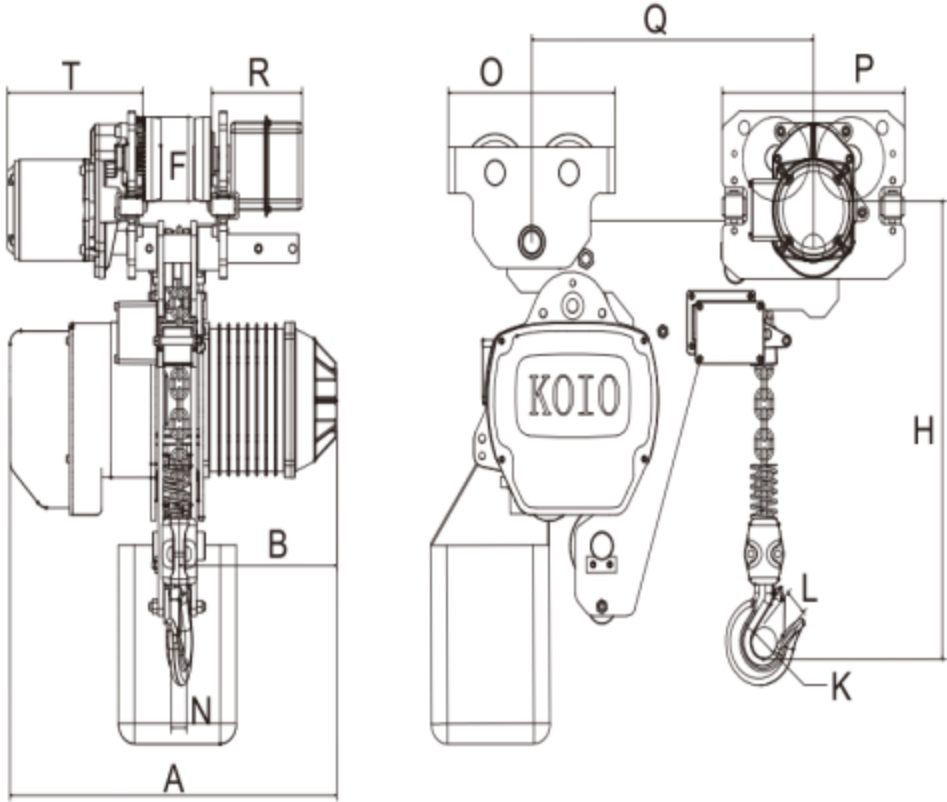

| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 操作电机 Operating Moter |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 3/9                           | 7.2                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.2                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 3.6                              | 1.1                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 1                       | 3/9                           | 6.8                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 3.4                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 2                       | 3/9                           | 6.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.4                  | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 2.2                              | 1.5                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 3.3                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 3                       | 3/9                           | 5.6                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 5                       | 3/9                           | 2.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |
| 7.5                     | 3/9                           | 1.8                              | 3.0                 | 1440                            | 3            | 220-440              | 50/60                   | 0.75                 | 1440                            | 3            | 220-440              | 50/60                   |


Size

|            |     |     |     |      |     |    |    |     |     |       |     |     | Unit(mm)  |
|------------|-----|-----|-----|------|-----|----|----|-----|-----|-------|-----|-----|-----------|
| 容量Capacity | H   | A   | B   | F    | K   | L  | N  | O   | P   | Q     | T   | R   | 工字钢I-BEAM |
| 0.5        | 350 | 460 | 230 | φ60  | φ32 | 25 | 17 | 190 | 315 | 400.7 | 185 | 168 | 100-160   |
| 1          | 410 | 460 | 230 | φ95  | φ40 | 31 | 24 | 190 | 315 | 400.7 | 252 | 168 | 100-160   |
| 1          | 480 | 520 | 260 | φ95  | φ40 | 31 | 24 | 190 | 315 | 445   | 252 | 168 | 100-160   |
| 2          | 535 | 520 | 260 | φ110 | φ49 | 35 | 30 | 257 | 325 | 444.5 | 252 | 168 | 120-160   |
| 2          | 570 | 620 | 300 | φ110 | φ49 | 35 | 30 | 257 | 325 | 505   | 252 | 168 | 120-160   |
| 3          | 680 | 520 | 260 | φ125 | φ59 | 42 | 35 | 310 | 325 | 584   | 252 | 168 | 120-160   |
| 3          | 685 | 620 | 300 | φ125 | φ59 | 42 | 35 | 310 | 340 | 503   | 252 | 168 | 120-160   |
| 3          | 640 | 620 | 300 | φ125 | φ59 | 42 | 35 | 310 | 340 | 526   | 252 | 168 | 120-160   |
| 5          | 740 | 620 | 300 | φ175 | φ60 | 45 | 43 | 355 | 400 | 541   | 252 | 168 | 120-160   |
| 7.5        | 900 | 620 | 300 | φ175 | φ83 | 68 | 55 | 355 | 400 | 751   | 252 | 168 | 120-160   |

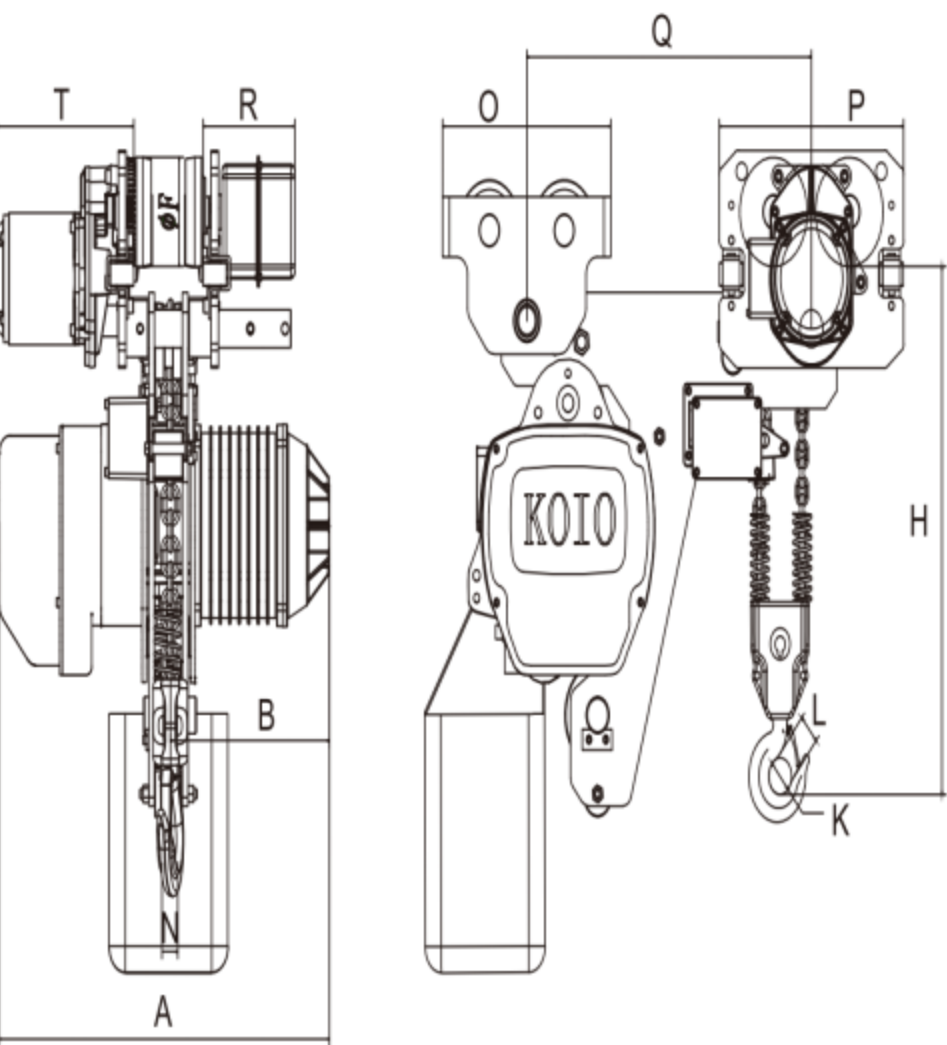

| 容量<br>Capacity<br>(Ton) | 起升高度<br>Lifting Height<br>(m) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 运行速度<br>Traveling speed<br>(m/min) | 操作电机 Operating Moter |                                 |              |                      |                         |
|-------------------------|-------------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|------------------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                               |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |                                    | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 10                      | 3/9                           | 2.8                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                              | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 15                      | 3/9                           | 1.8                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                              | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 20                      | 3/9                           | 1.4                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                              | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |
| 25                      | 3/9                           | 1.1                              | 3x2                 | 1440                            | 3            | 220-440              | 50/60                   | 10/20                              | 0.75x2               | 1440                            | 3            | 220-440              | 50/60                   |

| Unit(mm)   |      |     |     |      |     |     |      |     |    |           |       |
|------------|------|-----|-----|------|-----|-----|------|-----|----|-----------|-------|
| 容量Capacity | H    | A   | B   | D    | E   | F   | K    | L   | N  | 工字钢I-BEAM | Chain |
| 10         | 880  | 630 | 315 | 1620 | 365 | 365 | φ83  | 68  | 55 | 150-220   | φ11.2 |
| 15         | 1100 | 630 | 315 | 1840 | 365 | 365 | φ115 | 90  | 72 | 150-220   | φ11.2 |
| 20         | 1180 | 630 | 315 | 2050 | 365 | 365 | φ115 | 90  | 72 | 150-220   | φ11.2 |
| 25         | 1280 | 630 | 315 | 2265 | 365 | 365 | φ142 | 110 | 85 | 150-220   | φ11.2 |

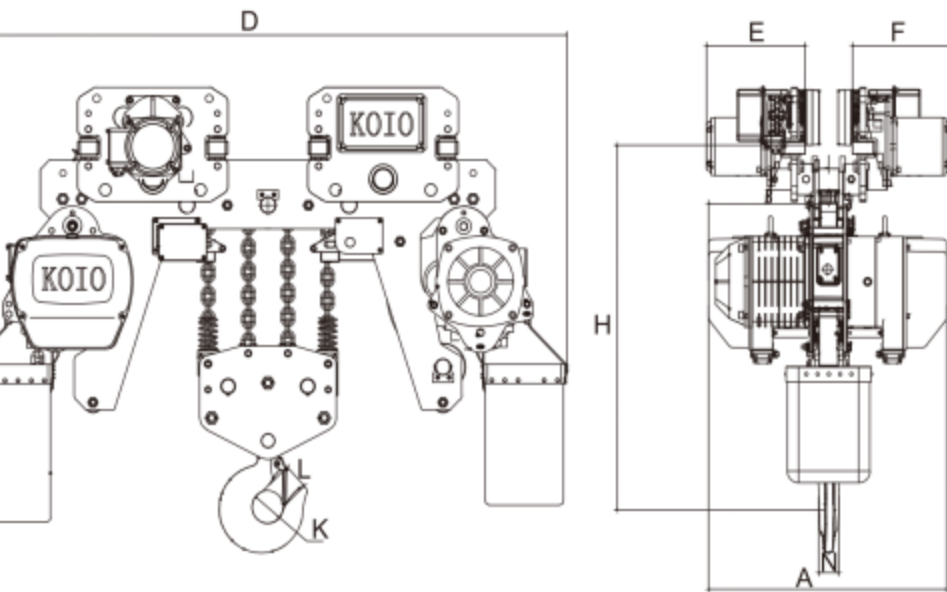

| 容量<br>Capacity<br>(Ton) | 起升速度<br>Lifting speed<br>(m/min) | 起升电机 Lifting Moter  |                                 |              |                      |                         | 移动速度<br>Traveling speed<br>(m/min) | 操作电机 Operating Moter |                                 |              |                      |                         |
|-------------------------|----------------------------------|---------------------|---------------------------------|--------------|----------------------|-------------------------|------------------------------------|----------------------|---------------------------------|--------------|----------------------|-------------------------|
|                         |                                  | 功率<br>Power<br>(kw) | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |                                    | 功率<br>Power<br>(kw)  | 转速<br>Rotation speed<br>(r/min) | 相位<br>Phases | 电压<br>voltage<br>(V) | 频率<br>Frequency<br>(Hz) |
| 0.5                     | 7.2/2.4                          | 1.1                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.2                  | 1440/480                        | 3            | 220-440              | 50/60                   |
| 1                       | 3.6/1.2                          | 1.1                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.4                  | 1440/480                        | 3            | 220-440              | 50/60                   |
| 1                       | 6.8/2.3                          | 1.5                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.4                  | 1440/480                        | 3            | 220-440              | 50/60                   |
| 2                       | 3.4/1.1                          | 1.5                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.4                  | 1440/480                        | 3            | 220-440              | 50/60                   |
| 2                       | 6.6/2.2                          | 3                   | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.4                  | 1440/480                        | 3            | 220-440              | 50/60                   |
| 3                       | 2.3/0.8                          | 1.5                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.4                  | 1440/480                        | 3            | 220-440              | 50/60                   |
| 3                       | 3.3/1.1                          | 3                   | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75                 | 1440/480                        | 3            | 220-440              | 50/60                   |
| 3                       | 5.6/1.9                          | 3                   | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75                 | 1440/480                        | 3            | 220-440              | 50/60                   |
| 5                       | 2.8/0.9                          | 3                   | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75                 | 1440/480                        | 3            | 220-440              | 50/60                   |
| 7.5                     | 1.8/0.6                          | 3                   | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75                 | 1440/480                        | 3            | 220-440              | 50/60                   |
| 10                      | 2.8/0.9                          | 3x2                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75                 | 1440/480                        | 3            | 220-440              | 50/60                   |
| 15                      | 1.8/0.6                          | 3x2                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75x2               | 1440/480                        | 3            | 220-440              | 50/60                   |
| 20                      | 1.4/0.5                          | 3x2                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75x2               | 1440/480                        | 3            | 220-440              | 50/60                   |
| 25                      | 1.1/0.4                          | 3x2                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75x2               | 1440/480                        | 3            | 220-440              | 50/60                   |
| 32                      | 0.9/0.3                          | 3x2                 | 2880/960                        | 3            | 220-440              | 50/60                   | 10/3.3                             | 0.75x2               | 1440/480                        | 3            | 220-440              | 50/60                   |

Dual Speed